


IF

FLX M housing with insert for accessories for Sentrion S4.

INSTALLATION AND COMMISSIONING

Instruction No:350-263 \$ {/d:article [1]/@xml:lang} \$

PRODUCT IMAGE

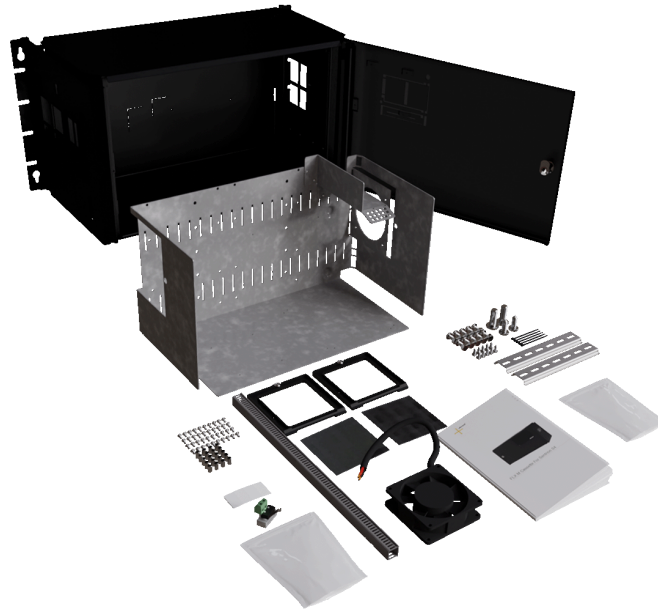


NAME, ARTICLE NUMBER AND E-NUMBER

Name, article number and email number

Name	Item number	E-number (sv)
FLX M Cassette for Sentrion S4	FM01000000FLX01	52 137 15

WHAT COMES WITH IT?

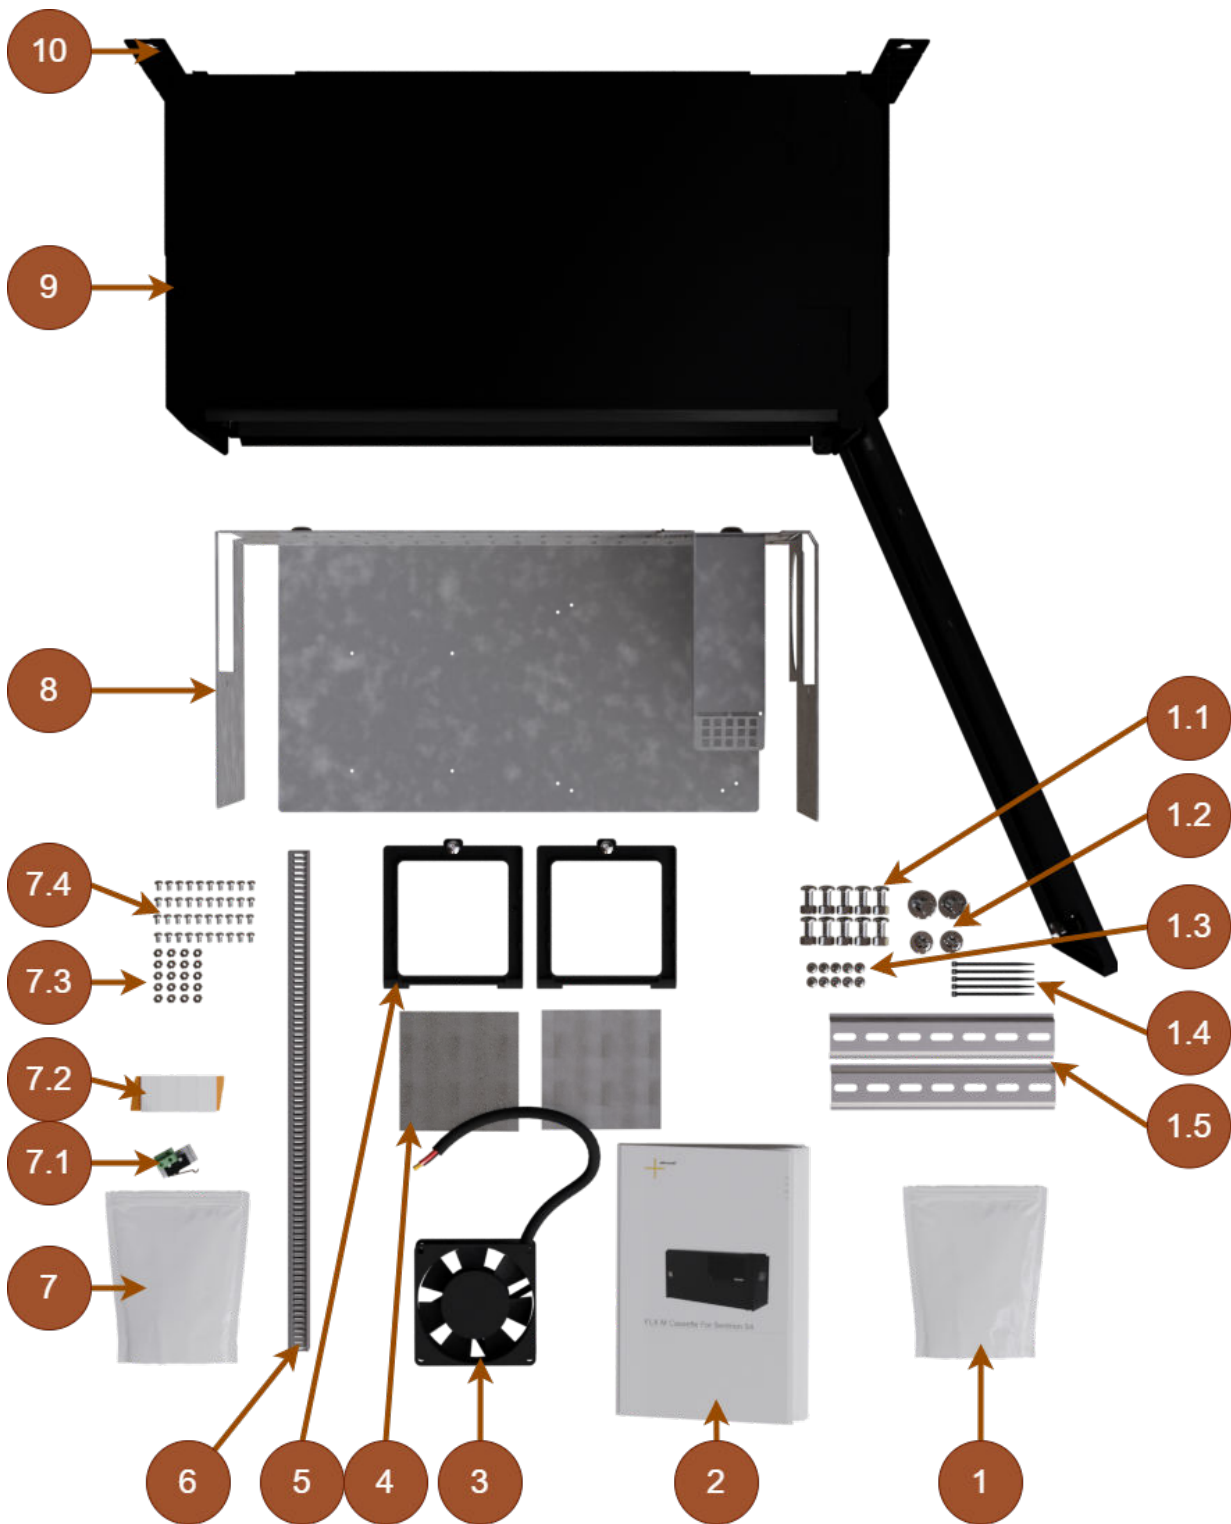

No	Explanation
1	Pouch.
1.1	10 pieces of screw, M5x6 and lock nut, M5.
1.2	Two screws, M5x16 and two screws, M5x6.
1.3	Ten screw, 2.9 mm.
1.4	Five cable ties, 9 mm.
1.5	Two DIN rails, 190 mm.

No	Explanation
2	User manual in Swedish.
3	Fan, 24 V.
4	Ventilation grille.
5	Holder for ventilation grilles.
6	Cable channel, 400 mm.
7	Pouch.
7.1	Tamper switch, 12 V or 24 V.
7.2	Four attachment pads.
7.3	20 spacers, M3, 10 mm.
7.4	40 pieces TT screw M3x6.
8	Plate insert.
9	FLX M tin box.
10	Bracket for wall or 19" rack.

OVERVIEW CONFIGURATIONS

Configuration 1

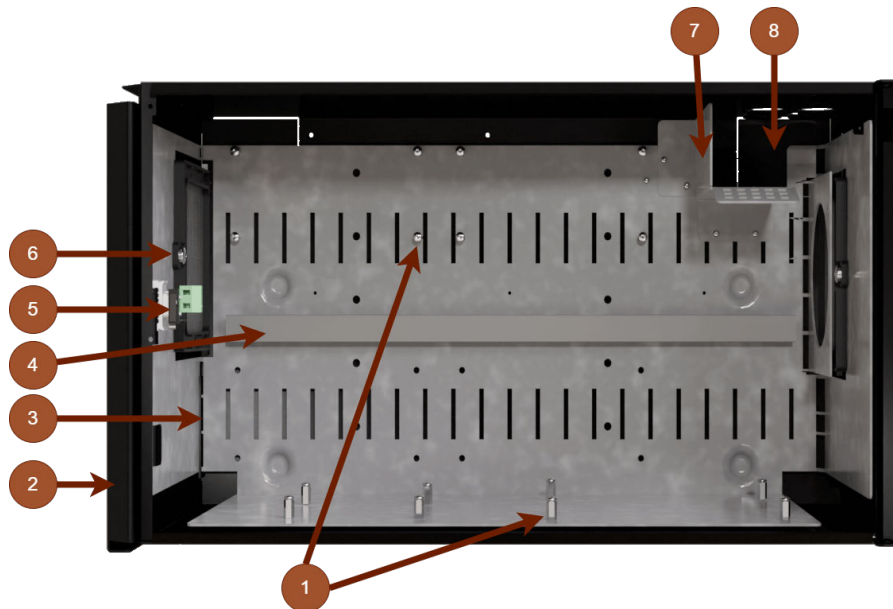


Image of how components can be assembled.

Configuration 2


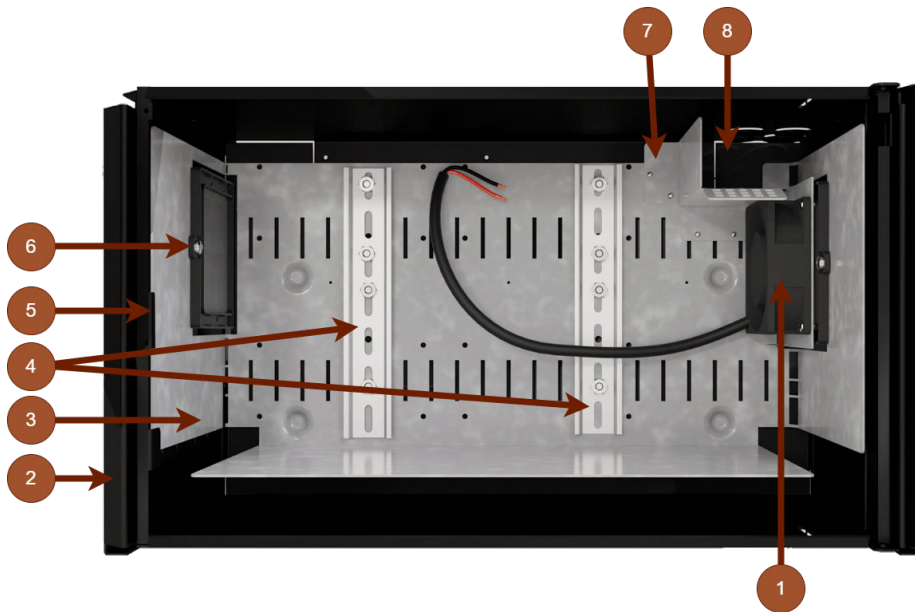


Image of how components can be assembled.

No	Explanation Both configurations	Explanation configuration 1	Explanation configuration 2
1	-	Distances.	Fan.
2	Enclosure.		
3	Cassette plate.		
4	-	Cable channel.	DIN rails.
5	Tamper contact, place for.		
6	Ventilation grille.		
7	Sheet metal cable channel.		
8	Cable entries.		


INSTALL THE SUPPLIED COMPONENTS

Mount configuration 1

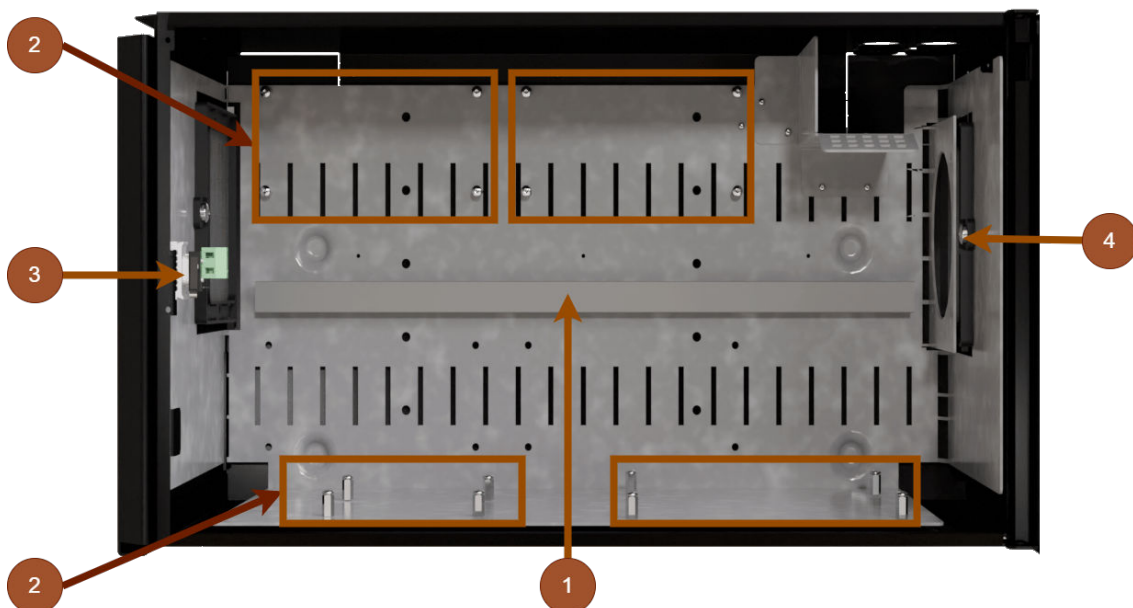

No	Explanation
1	Cable channel is screwed into sheet metal.
2	Mount spacers and screw on plate. Distances are screwed from both sides. Use two screws per spacer.
3	The tamper contact is pressed onto a sheet tongue in the enclosure.
4	Ventilation grilles are placed in holders and screwed into sheet metal.

Mount configuration 2

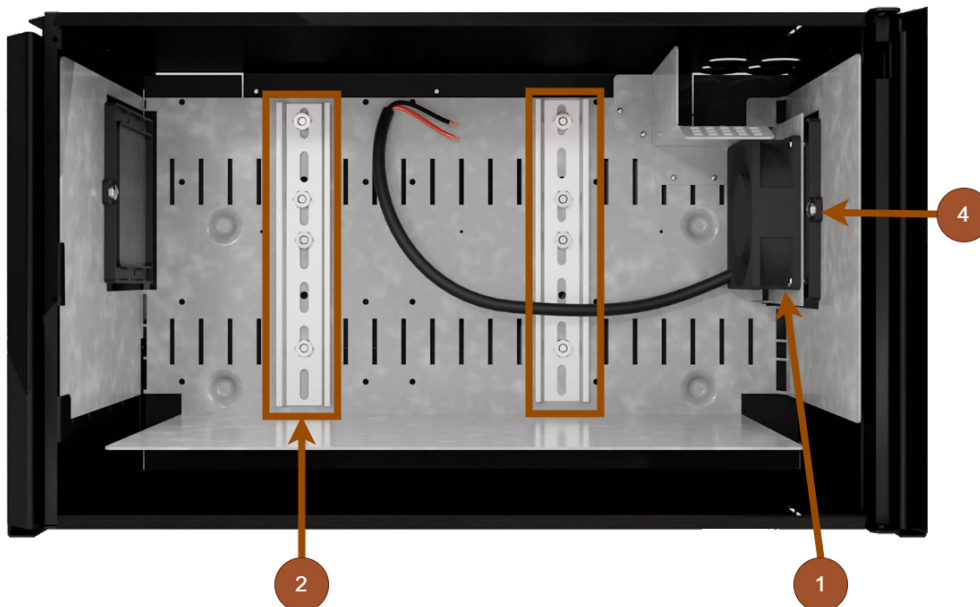

No	Explanation
1	Fan is screwed with four sheet metal screws.
2	Mount DIN rails with four screws and nuts in each DIN rail.
3	-
4	Ventilation grilles are placed in holders and screwed into sheet metal.

ENCLOSURES

Console

The supplied brackets can be attached in two ways: When mounting on a wall, the brackets must sit backwards, against the wall. When mounting in a 19" rack, the bracket must sit at the front of the unit.

Console

[sv] Bokstav	Explanation
A	Console is pushed in from the bottom up.
B	Clip clicks in when bracket is pushed in correctly.


Mounting

Use the appropriate screw for mounting on a wall or in a 19" rack. Screws for mounting on a wall or in a rack are not included.

PRODUCT SHEET - POWER SUPPLY / BATTERY BACKUP

Product sheet - power supply from Milleteknik

PRODUCT IMAGE

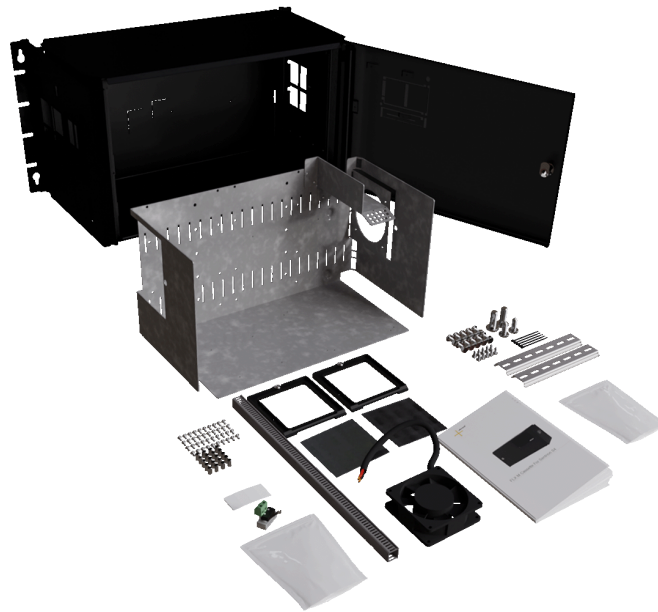

NAME, ARTICLE NUMBER AND E-NUMBER

Name, article number and email number

Name	Item number	E-number (sv)
FLX M Cassette for Sentrion S4	FM01000000FLX01	52 137 15

DESIGNATION

Accessory box for Sentrion S4

AREA OF USE

To install accessories for the Sentrion S4 in its own enclosure.

TECHNICAL DESCRIPTION

Box with insert for attaching accessories to DIN rail or insert.

ENCLOSURE

Sheet metal cabinet for wall mounting or in a 19" rack cabinet (5 HE). Powder-coated black. Four cable entries on the top and outlet holes on the back. Cable tie holder in enclosure.

Dimensions, with and without packaging.

Dimensions, height x width x depth. ^a	Dimensions with packaging.
224 x 437 x 212 mm	260 x 480 x 250 mm

^aDimensions of product and packaging may differ, this is because the product may lie differently in the packaging.

Height units, fan and IP class.

HE	Built-in fan	IP class
5	Yes	IP32

WEIGHT

Weight.

Name	Net weight	Weight incl. packaging
FLX M Cassette for Sentrion S4	7.35 kg	8.25 kg

INSTALLATION REQUIREMENTS

The device is intended for fixed installation. The unit must be installed indoors, environmental class 1, ambient temperature: +5°C to +40°C. Recommended ambient temperature is +15°C to +25°C (for optimal battery life).

REQUIREMENTS THAT THE PRODUCT MEETS

The product meets the following requirements.

CE:	CE directive according to: 765/2008
Environment	REACH Regulation: Directive 1907/2006, WEEE Regulation: Directive 20021961E, RoHS Regulation: Directive 2015/863



NOTE

The product is part of electrical systems, is subject to the relevant electrical and safety directives and is not a machine according to the Machinery Directive (2006/42/EC).



LIMITATIONS

As the unit's details are not assembled, it is the installer's responsibility that these and components are assembled safely and correctly. If 230 V is drawn into the product, the components, plate and door must be earthed.

GUARANTEE

The product has a two-year warranty for manufacturing defects.

MANUFACTURING, LIFESPAN, ENVIRONMENTAL IMPACT AND RECYCLING

Manufactured by Milleteknik in Partille, Sweden.

LINK TO THE LATEST INFORMATION

Products and software are subject to updates, you will always find the latest information on our website.

[Accessories & options](#)

ABOUT THIS INFORMATION

All information is published subject to possible errors. Information is updated without prior notice.

Publication date 2025-07-14

ADDRESS AND CONTACT DETAILS